

## KIT/201S/372S



## Features

### OEU-201S-HMK-W

- Metal casing.
- Supports call and intercom with the connected indoor station and app.
- Supports security protection alarm and tamper alarm triggered by door magnet, infrared, etc.
- Supports Wi-Fi.
- Built-in IC card reader.

### OEI-372S-H-W

- ABS casing and glass panel, solid and durable.
- Supports Wi-Fi.
- Supports touchscreen operation.
- 1024 x 600 HD screen.
- Supports remote door opening by sending signal to the door station.
- Allows to view live video of connected door stations and network cameras.

## Kit Components

\*OEU-201S-HMK-W x1

\*OEI-372S-H-W x1

\*32GB TF card x1

\*Power adapter

## Specifications


Model	KIT/201S/372S
Kit dimensions (LxWxH)	268mm*213mm*180mm
Kit weight	1.855kg

Model	OEU-201S-HMK-W
Power supply	DC12V $\pm$ 25%, PoE power supply
Card capacity	10000
Operating system	Linux
Illuminator	IR light (adaptive)
WDR	Support
FOV	Horizontal: 124.3° Vertical: 67.5° Diagonal: 147.2°
Power consumption	< 10W
Volume adjustment	Support
Audio quality	Noise reduction, echo cancellation, auto gain control
Audio input	Built-in mic
Audio output	Built-in speaker
Protocol	Uniview private protocol
Audio compression format	PCM, G711, MP3
Audio compression bit rate	128kbps
Button	Call button
Ingress protection	IP65 (Apply waterproof glue to the gap between the device and the wall. See the corresponding quick guide for details.) IK08
Weight	0.267kg
Mount method	Wall mount, flush mount
Interface	Power supply*1, network interface*1, RS485*1, door lock interface*2, IO input*4
Communication mode	100Mbps network interface, supports IEEE802.3af; Wi-Fi
Dimensions (LxHxW)	79mm*171mm*34mm
Operating environment	- 30°C to 60°C, 10% to 90% RH noncondensing, outdoor
Model	OEI-372S-H-W
Power supply	DC12V $\pm$ 25%, PoE power supply
Screen resolution	1024 x 600
Display screen	7-inch ultra-thin TFT LCD touch screen
Operating system	Linux
Audio quality	Noise reduction, echo cancellation, auto gain control
Audio input	Built-in mic
Audio output	Built-in speaker
Audio compression format	MP3, G711
Audio compression bit rate	128kbps
Protocol	Uniview private protocol
TF card	1 x 32G TF card, capable of storing 100 live video snapshots, 200 call records and call snapshots.
Power consumption	< 10W


Weight	0.377kg
Interface	Power supply*1, network interface*1, RS485*1, IO output*2, IO input*8, TF card slot*1
Communication mode	100Mbps network interface, supports IEEE802.3af; Wi-Fi
Dimensions (LxHxW)	193.2mm*143.4mm*25mm
Operating environment	- 10°C to 55°C, 10% to 90% RH noncondensing, indoor


## Dimensions

### OEU-201S-HMK-W

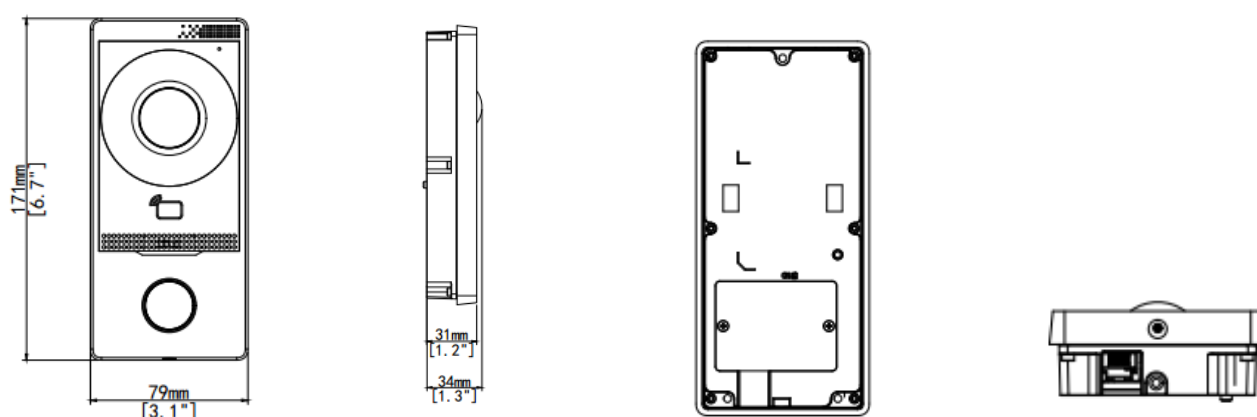

### OEI-372S-H-W

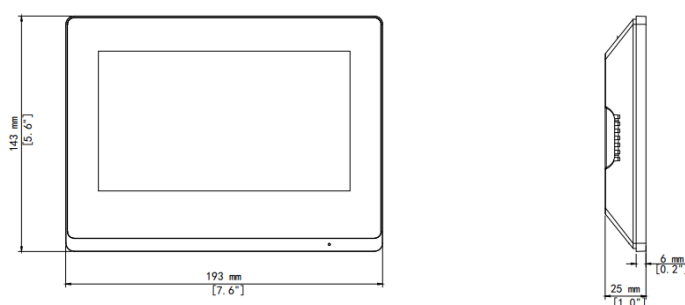

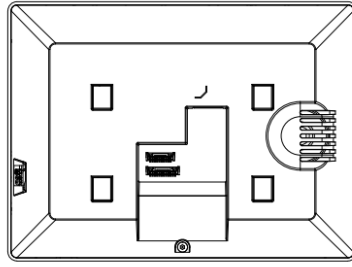**Zhejiang Uniview Technologies Co., Ltd.**

Xietong Street No. 369, Binjiang District, Hangzhou, China (310051)

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)


<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\* Product specifications and availability are subject to change without notice.

## Ethernet PoE Switches Datasheet

### NSW2020-6T-POE-IN

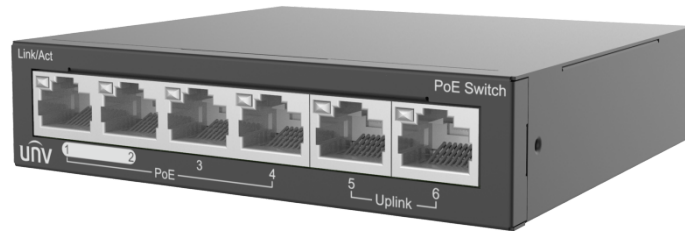

## Features

- Multiple working modes to address your business needs: Default(Normal mode), EXTEND(Surveillance mode)
- Support port traffic control
- Up to 250m transmission distance on Extend mode
- Support buffer optimization
- All metal housing, safe and reliable

## Specifications

Model	NSW2020-6T-POE-IN
Hardware Specification	
Ports Type	6×100Mbps network ports (RJ45), including 4 PoE ports
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Switching capacity	1.2 Gbps
Packet Buffer	448K bit
Forwarding performance	0.90Mpps
MAC	1K
Prior Ports	1 to 2
Power Supply	DC: 48/51V, powered by adapter (AC100-240V, 50/60Hz)

PoE	support POE
Max. PoE Power	Max capacity: 60 W, Max capacity for single port: 30 W
Storage Temperature	-40 °C to 70 °C
Operating humidity	10%~90% (non-condensing)
Cooling Fans	0
Weight	0.19KG
Dimensions (W×D×H)	107*101*25mm
Storage humidity	5%~90% (non-condensing)
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)
Indicator	POWER Steady on: AC input is normal, POWER Off: No AC input, No PoE Indicator, PoE-MAX off: The POE power supply power of the whole machine is less than 80% of the specification, PoE-MAX Steady on : The POE power supply power of the whole machine is greater than 85% of the specification, LINK/ACT Off: No link, LINK/ACT Steady on: Linked, LINK/ACT Flashing: Transmitting data
Working Mode	Default (Normal mode) : All ports can communicate with each other, EXTEND (Surveillance mode): Transmission distance up to 250 meters

## Ordering Info

Product Model	Description
NSW2020-6T-POE-IN	Unmanaged Ethernet Switch(PoE)

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.